better than hand trim

A DELEAFING CANNABIS ROBOT

Dimensions



WHY SILICONE?

- Increased flower yield for increased profit
- Natural flower formations are intact
- Preserve trichomes to reserve THC levels and aromas

	Difficusions	UU AUT AUT
	Utilities	120V 20 amps
	Weight	800 pounds
	Dry flower output	20 SECONDS/POUND
	Noise level	Normal conversation can be had
	Manufacture method	Single piece flow
	Placement of Softrim	In the dry room
_	Materials	Silcone, 304 stainless, hardened
		aluminum, delrin
	Safety sensors	Front door, back door, e-stop
	Motors	Servo, direct, linear
	Power cable	20 foot
	Warranty	1 year
	Design engineering	10 year lifespan
	Silicone finger belts	Lifespan approx 4K to 5K pound

63"x31"x54"



ROBOTIC SERVO CONTROLS

- On-the-fly micro adjustments
- Store your settings
- 4-way process parameters

engineering task

We believe post-harvest processing is a manufacturing The trimming process has a direct correlation between grown flower yield and profit

Softrim INDOOR Machine

















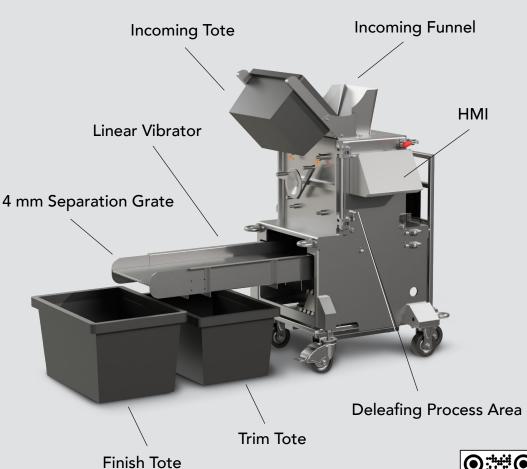

A product of PLATFORMROBOTICS

softrimusa.com

